


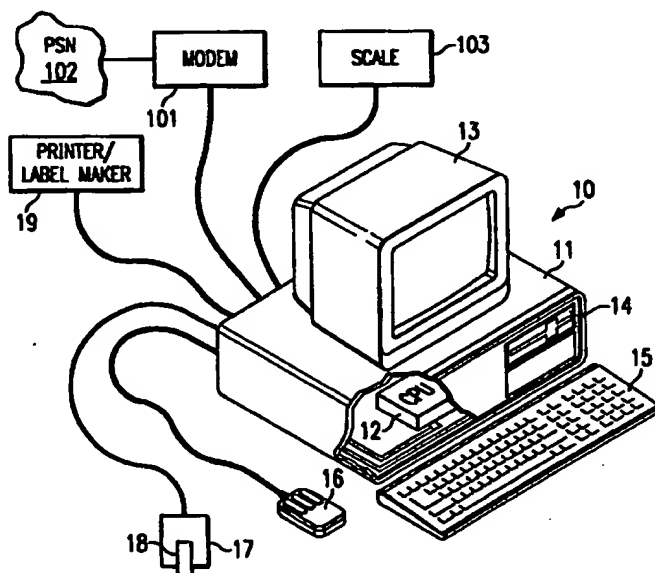

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G07B 17/02, 17/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 95/19016</b>
			(43) International Publication Date: <b>13 July 1995 (13.07.95)</b>
(21) International Application Number: <b>PCT/US95/00237</b>		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).	
(22) International Filing Date: <b>3 January 1995 (03.01.95)</b>			
(30) Priority Data: 08/176,716      3 January 1994 (03.01.94)      US 08/263,751      22 June 1994 (22.06.94)      US			
(71)(72) Applicant and Inventor: <b>KARA, Salim, G. [CA/US]; Unit No. 505, 505 Cypress Station Drive, Houston, TX 77090 (US).</b>		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(74) Agents: <b>TANNENBAUM, David, H. et al.; Winstead Sechrest &amp; Minick, 5400 Renaissance Tower, 1201 Elm Street, Dallas, TX 75270 (US).</b>			

(54) Title: **STORING, RETRIEVING AND AUTOMATICALLY PRINTING POSTAGE ON MAIL**

## (57) Abstract

A system and method for printing a postage meter stamp, including a desired postage amount and encrypted information, onto a piece of mail. A user takes a postal storage device to the post office in order to obtain a replenishment of the amount of postage stored within the postage storage device. A desired amount of postage is entered into the storage device by a postal employee through a processor-based system. The user is then able to access this stored postage at the user's location through a complementary processor-based system. The user's processor-based system automatically calculates the required postage for a piece of mail based upon a set of parameters pertaining to that piece of mail. Additional information, such as addresses, may also be printed onto an envelope, a label, a card, a letter, etc., along with the postage meter stamp through the use of a word processor program coupled to the present invention.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

STORING, RETRIEVING AND AUTOMATICALLY  
PRINTING POSTAGE ON MAIL

TECHNICAL FIELD OF THE INVENTION

This invention relates, in general to a portable postage storage device that can be coupled to processor-based systems to receive and retrieve an amount of authorized postage. More specifically, the invention relates to a system and method for a user to automatically calculate the necessary postage for an item of mail and print a postage meter stamp for the calculated amount, along with other encrypted information, on a piece of mail or postage label under the control of a word processing program.

BACKGROUND OF THE INVENTION

Presently, it is common for individuals or businesses to have residing within their offices a postage meter rented from a commercial business such, for example, Pitney Bowes. This arrangement is very convenient, since letters may be addressed, postage applied, and mailed directly from the office without requiring an employee to physically visit a post office and wait in line in order to apply postage to what is often a quite significant volume of outgoing mail, or to manually apply stamps to each piece of mail in which case mail is slower because it has to go through a postage cancelling machine.

Quite naturally, postage meters were developed to relieve the manual application of stamps on mail and to automate the above process. Nevertheless, a postage meter residing within an office is not all that convenient and efficient as it may first seem to be. First, a postage meter may not be purchased, but must be rented. The rental fees alone are typically over twenty dollars per month. For a small business, this can be quite an expense to incur year after year. Second, a postage meter must be adjusted, serviced and replenished manually; e.g., each day the date must be adjusted manually, periodically the stamp pad must be re-inked, and when the amount of postage programmed within the postage meter has expired the postage in the meter must be replenished. To be replenished, a postage meter must be manually unplugged, placed into a special case (the meter is of a significant weight), and an employee must visit a post office to have the meter reprogrammed with additional postage. Upon arrival at a post office, a teller must cut the seal,

replenish the meter with a desired amount of postage, and reseal the meter before returning it to the employee. The meter must then be returned to the office and powered up.

5           A slightly more expensive meter (rental of approximately \$30.00 more) works in the following manner: 1) a user sets up an account with Pitney Bowes, 2) 7 to 10 days before a user requires any postage, the user deposits with the meter owner the  
10           amount of postage required, 3) the user then calls the owner (7 to 10 days later) and they issue instructions as to the manual pushing of a variety of buttons on the meter (programming) which will replenish the postage amount on the meter. Nonetheless, the meter must be  
15           taken to the post office every 6 months.

          Thus, in addition to the monthly rent, the servicing and replenishing of the meter requires the time and expense of at least one employee to take the meter to a post office to have it replenished. Of  
20           course, this procedure results in down-time wherein the postage meter is not available to the business for the application of postage to outgoing mail. In addition, because of the monthly rent and the size of these devices, it is generally not practical for businesses  
25           to have more than one postage meter to alleviate this down-time.

          As previously mentioned, the alternative to a business, especially a small business, is to forego the advantages of a postage meter and to buy sheets, or  
30           books, of stamps. Without a doubt, this is not a sufficient solution. Since a variety of denominations of stamps are generally required, applying two 29¢ stamps to a letter requiring only 40¢, will begin to add up over time. Additionally, it is difficult for a

business to keep track of stamp inventories and stamps are subject to pilferage and degeneration from faulty handling. Moreover, increases in the postal rate (which seem to occur every three years) and the requirement for variable amounts of postage for international mail, makes the purchase of stamps even more inefficient and uneconomical.

Because of different postage zones, different classes of mail, different postage required by international mail and the inefficiency of maintaining stamps within an office, it is important to have an automatic postage system, such as the aforementioned inefficient and relatively expensive postage meter. Accordingly, there is a need in the art for a system and method that provides the automatic placement of postage on mail at locations other than a post office, while not requiring the use of a traditional postage meter.

SUMMARY OF THE INVENTION

Thus, it is a primary object of the present invention to provide a system and method for automatically providing for the placement of postage on mail outside of the environment of a post office, without requiring the use of a conventional postage meter.

In the attainment of the primary object, the present invention is embodied within a processor-based system located at a business' offices. A means is provided for purchasing a desired amount of postage at a post office and for storing this purchased amount within a postage storage device. Thereafter, a user may invoke the processor-based system to access the postage storage device and retrieve a portion of the stored amount of postage for subsequent printing on an envelope, a label, or a letter via a printer coupled to the processor-based system in a form similar to that employed by a conventional postage meter.

In a preferred embodiment of the present invention, the processor-based system is a personal computer ("PC") located within a business' office. The PC will store a program, hereinafter referred to as the "E-STAMP" program, which requests input from the user on the amount of desired postage and subsequently prints on an envelope, a letter or a label through a printer, or a special purpose label-maker, coupled to the PC the desired amount of postage. The desired amount of postage is printed as a meter stamp and may contain encrypted information for security purposes. The E-STAMP program interfaces with the user through the display screen and the keyboard, or mouse, of the PC.

In another preferred embodiment of the present invention, a touch memory utility ("TMU") button, manufactured by, for example, Dallas Semiconductor, Dallas, Texas, is utilized for transferring the purchased amount of postage from a post office to the processor based system at the user's office. Typically, a user will physically take the TMU button to (or purchase from) a post office location, that post office having a system complementary to the one installed on the customer's PC. A postal worker will interface the TMU button with the system residing at the post office in order to replenish the amount of postage programmed within the button in an amount requested and purchased by the customer. The user may also call a number (post office) and have the post office transfer the required amount of postage by modem. The post office may also elect to sell disposable TMU buttons pre-loaded in various denominations.

The customer will then physically carry the button back to the processor-based system, couple the button to a corresponding receiving apparatus coupled to the processor-based system so that portions of the stored postage may be downloaded to the E-STAMP program upon a request by the customer. Upon invocation of the E-STAMP program by the customer, the program will inform the customer of the newly obtained amount of postage via the display screen.

In yet another preferred embodiment of the present invention, the display screen coupled to the processor-based system employs a "windows" type display for interfacing with the user. Through the display screen, the E-STAMP program will request a password from the user and the amount of postage the user wishes to apply



to a piece of outgoing mail or corresponding label for subsequent application to a package or envelope. The user will enter the desired amount of postage, the program will retrieve this postage stored within the TMU button, and the E-STAMP program will print a meter stamp through a coupled printing device onto the outgoing mail or label.

In still yet another preferred embodiment of the present invention, the E-STAMP program may be coupled to a word processing program residing within the processor-based system. As a result, the application of the meter stamp may be made in conjunction with the word processing program, which has the capability to print envelopes, separately or in conjunction with the printing of a corresponding letter produced by the word processing program.

Furthermore, the E-STAMP program may also be programmed to print the address, return address and meter stamp on correspondence. This correspondence can then be placed in envelopes with cutouts or glassine paper at the appropriate areas so that the address, return address and/or meter stamp can be visualized through the envelope.

In another preferred embodiment of the present invention, the aforementioned TMU buttons are specially manufactured by Dallas Semiconductor for use in conjunction with E-STAMP programs, i.e., unique serial numbers specific to the E-STAMP program are embedded within each TMU button. These serial numbers are then provided to a post office for programming into their corresponding E-STAMP MAKER program and system. Thus, a form of security is provided since only the TMU buttons specially manufactured for use with the E-STAMP

program are able to receive or retrieve data pertaining to postage amounts, as previously described.

Additionally, a special password could be dedicated for use with the E-STAMP program so that access is only provided to users entering the correct password. As a result of the aforementioned, a post office can be assured that only authorized users are able to obtain postage replenishment, and that users are unable to replenish their postage within the E-STAMP program or the TMU button without cooperation from a post office. The aforementioned serial numbers and passwords may also allow a user and a post office to track postage used by every company, department, employee, etc. Furthermore, other software programs may also be configured to access the E-STAMP program so that spread sheets and/or graphs may be produced providing statistics on postage use within a business.

Furthermore, the E-STAMP program can be used to encode a variety of information within the postage meter stamp using symbol technology. Such information would be machine readable and can be used to identify meter stamp forgeries.

In an alternative embodiment of the present invention, the E-STAMP program is able to automatically calculate the correct postage to place on a letter, parcel or label as a function of the class, zone and weight of the particular item to be mailed. One embodiment of the present invention includes a balance coupled to the processor-based system so that mail can be placed on the balance and the weight of the mail automatically entered into the E-STAMP program for calculating the correct postage for that mail.

The foregoing has outlined rather broadly the features and technical advantages of the present

invention in order that the detailed description of the invention that follows may be better understood.

Additional features and advantages of the invention will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and the specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present

invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIGURE 1A illustrates a processor-based system for implementation of the present invention;

FIGURE 1B illustrates several embodiments of the postage storage device;

FIGURE 2 illustrates an embodiment of user instructions and screen prompts utilized by the present invention to interface with a user when installing the program on the processor-based system for implementation of the present invention;

FIGURE 3 illustrates an embodiment of a user registration form;

FIGURES 4A-4B illustrates a display screen utilized by the present invention to interface with a U.S. Post Office employee when replenishing postage within the present invention;

FIGURE 5 illustrates a flow diagram of the replenishing process;

FIGURE 6 illustrates a preferred embodiment of the security techniques utilized within the present invention;

FIGURE 7 illustrates a flow diagram of the operation of the present invention within a processor-based system;

FIGURE 8 illustrates a display interface provided to a user when accessing the present invention on a processor-based system; and

FIGURE 9 illustrates an envelope used to display the postage meter stamp printed on a letter.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides for a portable postage storage device, described in more detail below, that can be coupled to a processor-based system at both the customer's site and at the U.S. Post Office.

Throughout the remainder of this description, reference is made to the U.S. Post Office. Note, however, that the present invention may be implemented within any country and with respect to any postal system.

The present invention will allow an individual to purchase a desired amount of postage at a U.S. Post Office, such postage being stored within a postage storage device. The user may then invoke a processor-based system to access and retrieve a portion of the stored amount of postage via a program stored on a processor-based system, such program hereinafter referred to as the "E-STAMP" program. The E-STAMP program requests input from the user on the weight of the item to be mailed, the addressee's address, etc. The E-STAMP program will utilize the information that was entered to calculate the amount of desired postage for an item to be mailed and print a meter stamp on an envelope, label or letter through a printer or special purpose label maker coupled to the processor-based system.

The postage storage device can also be coupled to a processor-based system located at the U.S. Post Office. Particular post office sites will have installed a system complimentary to the E-STAMP system installed on the customer's PC. The program installed at the U.S. Post Office, hereinafter referred to as the "E-STAMP MAKER" will allow a postal worker to interface the postage storage device with the processor-base

system residing at the post office in order to replenish the amount of postage programmed within the postage storage device in an amount requested and purchased by the customer.

5 Referring to FIGURE 1, there is illustrated a processor-based system 10 utilized for implementing the present invention, specifically the aforementioned E-STAMP and E-STAMP MAKER programs. System 10 includes chassis 11 enclosing processor ("CPU") 12 and disk  
10 drive 14. Coupled to CPU 12 is display 13, keyboard 15 and mouse 16. Furthermore, system 10 is adapted for coupling with a postage storage device 18, such as the preferred embodiment touch memory utility ("TMU") button 182 illustrated in FIGURE 1B. Postage storage  
15 device 18 is coupled to the processor-based system 10 through a postage storage device receptor 17.

The postage storage device may be any memory device having some residual data capability, where that  
20 memory device can provide sufficient security measures to efficiently limit access to the memory of the device to authorized users. For example, since algorithms can be used to control access to the memory device a standard "diskette" can be used if desired.

The preferred embodiment, TMU button 182  
25 incorporates a small disk having a memory. TMU button 182 is a small, light-weight, portable, essentially non-breakable device available from Dallas Semiconductor, Dallas, Texas. A TMU button 182 may be coupled to processor-based system 10 through button  
30 holder 172. In a preferred embodiment of the present invention a batch of TMU buttons will be manufactured with specifically designated serial numbers for use solely with the present invention. However, disposable TMU buttons 182, preloaded in various denominations,

could also be sold either over the counter or in existing stamp machines at post office locations. The post office may also select to sell pre-loaded TMUs, on which the customer pays a deposit, that can be  
5 exchanged for another TMU or returned for the deposit whenever button 182 is depleted of postage. All postal locations may sell pre-loaded TMUs or the post office may elect to designate particular post office locations for selling TMUs.

10 An advantage of the preferred embodiment (the TMU button 182) is that a TMU button 182 is small enough and light enough that several may be carried in one hand. Furthermore, the TMU button 182 is sufficiently durable to be sent through interoffice mail.

15 Additional alternative embodiments of the postage storage device 18 are illustrated in FIGURE 1B. One alternative postage storage device 18 is a smart disk 188 incorporating its own electronic modules capable of read/write operations. One embodiment of such a smart  
20 disk 188, Smart Disk™, can be obtained from Smart Disk Security Corporation, Naples, Florida. The Smart Disk™ looks like a floppy disk and fits into a typical PC's floppy disk drive, connected either externally or internally to processor-based system 10; however, Smart  
25 Disk™ has its own microprocessor that provides secure, password protected storage. One advantage of the Smart Disk™ is that it can operate in a standard PC disk drive without modification to the disk drive or PC. Smart Disk™ provides security for stored postage with  
30 an encrypted password and the encryption algorithm.

Another type of postage storage device 18 is a smart card 186, a plastic card embedded with a microchip. The microchip contain mathematical formulas that encrypt computer data to secure access to that

data (i.e., postage) and verify a user's identity before allowing access to the data. One drawback in the currently available smart cards 186 is that they require a magnetic card processor 176 hooked to the processor-based system 10.

Still another type of postage storage device 18 is a PCMCIA card 184. PCMCIA cards are currently used on notebook computers for modular storage and communication. Both external and internal add-on hardware 174 (i.e., card slots) are available for PCs.

The postal storage device 18 may be used on a variety of processor-based systems 10. Processor-based systems 10 may be located in an individual's home, at any business location, or may even be present in a post office lobby for after hour usage. In a preferred embodiment, system 10 is a PC. In an alternative embodiment, system 10 could be part of a main-frame computer or system 10 could be part of a network system.

Typically, a user will buy a postage storage device 18, containing a small quantity of postage, with a copy of the E-STAMP program. The user will then install the E-STAMP program on the user's processor-based system 10. FIGURE 2 illustrates one embodiment of user instructions and screen prompts to be followed by the user during the installation of the E-STAMP program. The instructions and screen prompts illustrated in FIGURE 2 reflect the installation of the E-STAMP program in a "windows" operating environment on a PC equipped with a TMU button 182 and TMU 172 holder. Of course, other means could be employed for implementing the present invention within a processor-based system 10.



The user installation instructions 201 inform the user how to pull up the E-STAMP installation program. Once the installation program is initiated, screen 203 will appear. Screen 203 instructs the user to connect the TMU holder 172 to a serial port and to insert the TMU button 182 into the holder 172. The user is then instructed to turn on a printer 19 that has been coupled to the processor-based system 10 and check to see that the printer 19 is supplied with paper.

Screen 203 further requests that the user prepare the following information: the user's full name and address, an identification number for the user (i.e., an employer identification number (EIN#), if the user is a business or organization; or a social security number (SS#), if the user is an individual), the user's zip code, the user's telephone number and the user's fax number. The next screen, screen 205 displays the Post N Mail License Agreement with its legal terms and conditions. Acceptance of the terms and conditions set out in the license agreement is indicated when the user continues with the installation program.

Next, screen 207 will appear and display the E-STAMP serial number and TMU serial number. At this time the user-specific information requested in screen 203 should be entered into the E-STAMP program. Once the user has entered the user-specific information, screen 209 will appear warning the user to carefully verify the correctness of the entered information.

After verifying the information added into the E-STAMP program, screen 211 will remind the user to ensure that a coupled printer 19 is on line. The user information entered into the E-STAMP program will then be incorporated into a user registration form, one

embodiment of which is illustrated in FIGURE 3. The E-STAMP registration form will be printed in triplicate. The user is instructed to sign and mail two copies of the registration form to the creator of the E-STAMP program, Post N Mail, Inc. and to retain one copy of the registration form. Screen 211 also informs the user that a registration card will be mailed to the user in order that the user may access TMU refilling stations.

The E-STAMP installation program continues with screen 213, which describes the progress being made in installing the E-STAMP program, and screen 215, which informs the user when the E-STAMP program installation has been completed.

Referring to FIGURE 3, there is illustrated a preferred embodiment of the E-STAMP registration form. The registration form includes information such as the TMU button serial number 31, the E-STAMP serial number 32, the date and time that the E-STAMP program was installed 33, and user-specific information 35 (e.g., name, address, telephone and fax numbers, and identification number), and a copy of the Post N Mail License Agreement 38 having an identified location for the user to sign. A preferred embodiment of the E-STAMP registration form will also contain all of the information needed to specifically identify the TMU button, E-STAMP program, and registered user in an encrypted format 37. The encrypted information 37 will be in a machine-readable graphical security interface such as a standard bar code.

The standard bar code contains white and dark areas in the form of bars that can be read by a laser scanner. The laser scanner illuminates the white and dark areas with a light of a certain frequency. The

light is reflected back to the laser scanner in such a way as to indicate the pattern of white and black areas within the bar code. Since white areas reflect much more light than dark areas do, a perpendicular scan of the bar code will allow the scanner to translate the reflected light into the coded information. More than 20 linear bar code languages have been developed, each with its own specifications for how many bars and spaces make up a character, how characters are to be arranged, whether the characters can be letters as well as numbers, and so forth. The most widely-used bar code is the Universal Product Code (UPC) seen on everyday grocery items. The standard bar code currently used by the post office is POSTNET ZIP+4 described in Postal Service Publication number 67.

More sophisticated graphical security interfaces have been developed over the last decade, such as Intermec Corporations' Code 49 and Laserlight System Inc.'s Code 16K. A major advantage of these more sophisticated graphical security interfaces is that they contain an error-correction formula which can often recover the entire message even if parts of the code have been torn or damaged.

A preferred embodiment of encrypted information is a graphical security interface developed by Symbol Technologies of Bohemia, New York and is called PDF417, a portable data file. PDF417 is a graphical security interface constructed from data units called "words," each of which is 17 modules long. Bars are made from filling in up to six consecutive modules and each unit has four separate bars and four spaces. In essence, PDF417 can stack the equivalent of up to 90 one-dimensional bar codes, each just three hundredths of an inch high. Thus, the PDF417 symbology is more

complicated to produce and scan than is the typical one-dimensional bar code and allows for a denser coding of information. Because the PDF417 symbology specification includes sophisticated protocols for error-correction, the actual density of information is highly variable, but can be ten times the amount of information found in U.S.P.S. PostNet bar code, per square inch. PDF417 is available from Symbol Technologies, Inc., 116 Wilbur Place, Bohemia, N.Y. 11716 and the operation of the PDF417 is detailed in PDF Primer obtained from them and is hereby incorporated herein by reference.

When Post N Mail, Inc. receives the signed Post N Mail License Agreement from the user, the encrypted information 37 can be scanned with a laser scanner so that the information contained therein can be automatically transferred to a registered user's database. When the encrypted information 37 has been transferred to the registered user's database, a registration card containing a Post N Mail (PNM) serial number will be printed and mailed to the registered user.

The user may then take that registration card with the user's TMU button 182, or other postage storage device 18, to the post office to be registered with the post office. Until the TMU button 182 has been registered with the post office, the E-STAMP MAKER program will not recognize TMU button 182 as being an authorized postage storage device 18.

To register a TMU button 182, or other postage storage device 18, a postal worker must enter the information on the PNM registration card into the E-STAMP MAKER program. Such information will include the PNM serial number, EIN# number or SS#, TMU button

serial number, and the address and telephone number of the registered user. Once all of this information has been entered into the system, the E-STAMP MAKER program will then recognize TMU button 182 and allow a postal worker to replenish the amount of postage stored within button 182 at the request of the user in a manner to be discussed below.

System 10 may be utilized at a customer site for permitting a user to retrieve postage stored within postage storage device 18, via the E-STAMP program, for subsequent printing as a postage meter stamp onto a piece of mail through printer 19, coupled to system 10. The utilization of the E-STAMP program by a customer will be further described below.

Alternatively, a pair of systems 10 may be linked together through Public Switched Network ("PSN") 102 via modem 101 or directly through digital telecommunications trunks (not shown). Processor based systems 10 located at different U.S. Post Offices may be linked via PSN 102 in a conventional well known manner (such as through modem 101) so that information may be shared between the various post offices. Generally, a copy of the E-STAMP MAKER program will be stored within at least one processor-based system at selected U.S. Post Office locations. PSN linkage of processor-based systems 10 by the post office and the customer, or user, will allow the sharing of information between the various post offices and will allow a customer to call a number (an authorized post office number) and have the post office transfer the required amount of postage to a postage storage device 18 button installed at a customer site by modem.

Referring to FIGURE 4A, there is illustrated a preferred embodiment of a display screen shown on

display 13 to a U.S. Post Office employee when accessing the present invention on system 10. Of course, the particular display aspects illustrated in FIGURE 4A may be modified in any one of numerous ways. Also, in a preferred embodiment of the present invention, processor-based system 10 will provide for input from a user via keyboard 15 and mouse 16. However, other various forms of input available to processor-based systems may be utilized, such as a light pen or a touch-sensitive screen (both not shown).

At the upper right-hand corner of display screen 40, there is indicated an E-STAMP MAKER serial number, in this example "77014-9998-44." This serial number may include the zip code of the post office location, or may be selected at random. This serial number may also include a designation of a particular system 10 or a designation of the postal employee performing the transaction.

In the upper left-hand corner of display screen 40 is illustrated a TMU serial number, in this example "2 128 176 32 0 0 0 175." This serial number represents eight bytes of information stored within TMU button 182, each byte may represent any number from 0 to 255. A TMU serial number is specifically assigned to and will identify a specific TMU button 182. Thus, display screen 40 indicates that the postal employee has coupled an authorized TMU button 182 to a processor-based system 10 which incorporates the E-STAMP MAKER program.

Typically, the first two numerals (bytes) within the TMU serial number are assigned by the button (or memory) manufacturer. The third byte is selected by the U.S. Postal System and identifies TMU buttons 182 specifically designed for the E-STAMP MAKER program,

excluding other TMU buttons 182 not designed for the E-STAMP MAKER program, such as disposable buttons, and assisting in the exclusion of any other means for accessing the E-STAMP MAKER program. As a result, the present invention may be designed so that only authorized TMU buttons 182 may access the E-STAMP MAKER program for replenishment of postage as will be discussed below.

The remainder of the TMU serial number is basically the sequential serial number of that particular TMU button 182 in particular.

As the E-STAMP MAKER program reads the information stored within TMU button 182, the TMU serial number and the information in blocks 401 and 402 are displayed on display 13. The "TMU Verification" information in block 401 shows the date and post office location where the last addition of postage was electronically stored within button 182. As shown within box 401 of FIGURE 4A, coupled TMU button 182 currently contains a postage balance of \$6.72, which is most likely a portion of the postage that was input into button 182 at 3:18 p.m. on October 30, 1993, at the post office having an ID number of "77090-2765-65." It may be observed that this serial number is different from the E-STAMP MAKER serial number shown at the upper right-hand corner of display screen 40, indicating that these numbers represent two different post office locations, and that button 182 was formerly coupled to a processor-based system 10 at post office "77090-2765-65" but is currently coupled to a processor-based system 10 residing at post office "77014-9998-44".

Box 401 also shows the expiration date of button 182, the user's PNM registration number, the user's E-STAMP serial number, and a strike and dollar

counter check as will be described in more detail below.

Box 402 is also displayed on screen 10 and itemizes the quantity of postage of designated values that has been used and subtracted from the postage stored in button 182. For example, box 401 of FIGURE 4A shows that \$500.00 worth of postage was initially added to button 182 and that \$6.72 worth of postage remains in button 182. This means that \$493.28 worth of postage has been deducted from button 182. Box 402 of FIGURE 4A shows that postage valued from \$.01 to \$.29 was subtracted from the amount of stored postage 991 times, that postage valued from \$.30-\$.40 was subtracted 166 times, that postage valued from \$.41-\$.45 was subtracted 122 times, that postage valued at \$1.00-\$1.99 was subtracted 14 times and that postage valued at more than \$3.00 was subtracted 16 times.

In a manner to be discussed in detail below with respect to FIGURE 5, the first password (i.e., BCLINTON) is entered into the E-STAMP MAKER software. That password will be used to generate other passwords as described below and checked against the information stored in button 182. If the post office requests it, an extra password can be included to access and start the E-STAMP MAKER program. When the correct password for button 182 is entered into E-STAMP MAKER (i.e., BClinton), a string of numerals are generated as shown in block 404. In a preferred embodiment of the present invention, the first several numerals within block 404 represent the current time and date. A second string of numerals represent the E-STAMP MAKER serial number and the post office identification number. The remainder of the 45 bytes are generated randomly by the



E-STAMP MAKER program. This generation of random numbers is detailed below.

5       Thereafter, a second password is generated from the numbers within block 404 through the application of an algorithm, an example of a second password is illustrated in block 405. These numbers are used as a second password to assist in the random generation of numerals within block 406.

10       In a preferred embodiment of the present invention, fourteen of the 45 bytes or numerals within block 406 represent a button usage analysis (i.e., how much of what value of postage has been used); three numerals (bytes) represent the number of strikes (or uses) that have been made and subtracted from a starting point of 2,500,000; and four numerals (bytes) represent the dollar value of postage used and subtracted from a starting point of \$2,500,000. The remainder of the numerals are generated randomly by the E-STAMP MAKER program.

20       Thereafter, another algorithm utilizes the numerals generated within block 406 to derive the third password displayed within block 407. If all is correct, the cursor will then stop within block 408 so that the postal employee may enter a desired amount of postage in U.S. dollars as requested by the user owning TMU button 182 currently coupled to the E-STAMP MAKER program. In a preferred embodiment of the present invention, four bytes represent the amount of postage entered by the postal worker, ten bytes represent user-specific information, five bytes represent the user's zip code, three bytes represent the original postage amount, three bytes represent the number of strikes (or times that the postal storage device has been accessed), four bytes represent the accumulated

25

30

value of postage taken from the postage storage device, and three bytes represent the expiration date of button 182. Button 182 may be programmed to expire at any time desired by the post office. The post office may  
5 desire that postage storage devices 18 expire every six months in order to maintain a valid registration with updated information.

None of the numbers described above, or the passwords generated therefrom, are displayed on the  
10 screen. However, E-STAMP MAKER utilizes information from button 182 to generate numerals in blocks 406 and 408 to generate the usage analysis log illustrated in block 402 and to perform a counters check illustrated in block 401. The counters check adds the number of  
15 strikes subtracted from 2,500,000 (see block 406; descending strike counter) to the number of strikes made (see block 408; ascending strike counter). If these numbers are accurate, their sum should equal  
2,500,000. A similar dollar counter check is also  
20 performed. The TMU button 182 is initialized to recognize 2,500,000 strikes and \$2,500,000 worth of postage. Whenever a user has used 2,500,000 strikes or used \$2,500,000 worth of postage, the postage storage device must be returned to the post office, or  
25 exchanged for a new one.

As shown in block 408, the user has desired to add \$500.00 worth of postage to TMU button 182. This amount has been entered by the employee. Subsequent to entering the \$500.00 amount, the postal employee will  
30 press button 409, and then press button 410 to "write" the \$500.00 amount into TMU button 182 coupled to system 10.

Alternatively, a user may maintain an account with the post office or a credit card account which will be

automatically charged for postal charges printed using TMU button 182. In this situation, a set money value will not be entered into TMU button 182, but rather an authorization to debit a particular account will be entered into TMU button 182.

Immediately thereafter, display screen 42, illustrated in FIGURE 4B, is shown to the postal employee. Display screen 42 is similar to display screen 40 except for the new information within block 411 which now shows that TMU button 182 contains \$506.72 worth of postage, which was updated at 10:45 a.m. on December 15, 1993 by the E-STAMP MAKER program located at post office location "77014-9998-44." Note that in this embodiment the postage original (block 411) and usage analysis log (block 412) are re-zeroed whenever new postage is added to TMU button 182.

Referring next to FIGURE 5, there is illustrated a flow diagram of the aforementioned method of providing security within the present invention. First, in block 510, the TMU serial number is accessed by the security program within the present invention. If the TMU serial number is not one specifically assigned to the U.S. Postal Service, the process will not proceed to step 520. In step 520, the program will write a password provided by the creator of the program. Thereafter, at step 530, the aforementioned data is produced and displayed within block 404. The random numerals will be produced as a function of the entered password.

Thereafter, in step 540, a first algorithm selected by the U.S. Postal Service will operate on the data within block 404 to produce a second password (step 550). This second password, displayed within block 405, is used within step 560 to generate a second

set of data (the numerals displayed within block 406). A second algorithm within step 570, utilizes the second set of data to produce a third password (step 580). Once the above is written on the TMU button 182, the post office employee will be able to store postage to TMU button 182 by adding the desired amount within block 408 (step 590). Thereafter at step 505, write button 410 is "depressed" to thereby store postage within TMU button 182.

Referring next to FIGURE 6, there is illustrated the algorithm used within the present invention, and described with respect to FIGURE 5. Note that the TMU serial number may be incorporated into the algorithm(s) to make each TMU button unique. For a given 8-byte password, "p1" represents the first byte of that password. For a given 45-byte data area, "d1" represents the first byte of that data. The "mod operator" stands for the modulus, or remainder, of a division.

Once the required amount of postage has been transferred to the TMU button 182 the user may then physically carry the button back to the user's business location and couple TMU button 182 to a processor-based system 10 through button holder 172. Upon invocation of the E-STAMP program by the customer, the customer's processor-based system 10 can access the postal amount stored in TMU button 182 and down-load portions of the stored postage to the E-STAMP program to be used for printing postage meter stamps on pieces of mail.

Referring next to FIGURE 7, there is illustrated a flow diagram of the process employed within processor-based system 10 configured for allowing a user to print a postage meter stamp. As previously discussed, the E-STAMP program may be a stand alone

program, or it may be associated and coupled with a word processor program. Therefore, the E-STAMP program may be started directly (step 701) or through a word processor program also residing on the processor-based system 10 (step 702). Thereafter, at step 703, the E-STAMP program shows display 80, illustrated and described with respect to FIGURE 8, to the user.

Next, in step 704, as shown in FIGURE 7, the E-STAMP program verifies the TMU serial number associated with TMU button 182 coupled to processor-based system 10. If TMU button 182 has not been inserted within its holder 172, at step 705, a message is flashed to the user to insert TMU button 182. If the wrong TMU button, or a TMU button not programmed for use with the E-STAMP program, has been inserted and coupled to system 10, a warning is flashed to the user to insert an authorized, or valid, TMU button 182 as illustrated in box 706. The process of TMU verification represented by box 704 includes several steps as follows:

Step 1 - Serial number is verified.

Step 2 - E-STAMP will match its Password 1 (BCLINTON) with the TMU's Password 1.  
If ok,

Step 3 - E-STAMP will read information in Data 1 (block 530) and process it through algorithm 1.

Step 4 - If the results of step 3 match Password 2, E-STAMP will proceed to Data 2 (block 560).

Step 5 - E-STAMP will read information in Data 2 and process it through algorithm 2.

Step 6 - If the results of step 5 match Password 3, E-STAMP will then be able to access

Data 3 which contains postage amount and proceed to step 707.

5 If a valid TMU button is coupled to system 10, at step 707, the information within TMU button 182 is read and the information is verified, for example the ascending and descending counters are added together for verification and the expiry data is verified if the postal balance is greater than \$2.01. In addition, the zip code, E-STAMP serial number and user identification  
10 number are verified. If all of the information checks out the TMU button's serial number is displayed in conjunction with the E-STAMP serial number in the top right corner of screen 80 (see 801). The remaining postage balance residing within TMU button 182, is  
15 displayed within block 806.

Next, at step 708, return address box 803 is completed automatically or manually. The address  
within 803 may be automatically entered from the adjoining word processor program, the address may be  
20 selected from a drop-down box (not shown), or the address may be manually input. Any entered address may be saved within the E-STAMP program. Additionally, if a return address is not desired, it may be omitted.

25 Thereafter, in step 709, the contents of address box 805 are entered in a manner similar to the contents of return address 803.

Next, at step 710, the user may select the print format by the use of box 804. As illustrated, the postage meter stamp may be printed on a label through  
30 printer/label maker 19, or a choice may be made to print the postage meter stamp on an envelope inserted within printer 19, which may be chosen to be a standard size or a nonstandard size as selected by the user. Note that if the postage meter stamp is to be printed

on a label, it may be desired that the return address within 803 and the address within box 805 not be printed.

Alternatively, the postage meter stamp and the addresses within boxes 803 and 805 may all be printed on a flyer, a pamphlet, a postcard or sheet of paper. Whenever the meter stamp is printed on a letter, along with the addresses in boxes 803 and 805, that letter may be folded so that the meter stamp will show through an opening or window 901, in the top right hand corner of a specially designed envelope 900 illustrated in FIGURE 9. Envelope 900 may be a standard or non-standard size with any number of windows as designed by the user. Typically, envelope 900 will have a first window 901 in the top right hand corner for the printed postage meter stamp to show through. Envelope 900 may also have other windows for the addressee's name and address (903) and for a return address (902) to show through. Envelope 900 may have glassine paper, or other transparent covering material 904, covering the described windows such that the postage meter stamp and other imprinted information is protected from inadvertent detachment and adverse conditions (such as inclement weather).

Thereafter, in step 711, the user enters the weight of the package or letter associated with the postage meter stamp. This weight may be entered manually, or automatically through the use of scale 103 coupled to processor-based system 10 in a manner well known in the art. In step 712, the user selects the class of mail from the choices shown in box 809.

At step 713, the user may select whether or not to print selected data within the meter stamp using a graphical security interface (see previous discussion

of graphical security interfaces). The graphical security interface may be a standard POSTNET ZIP+4 Coding as provided in Postal Service Publication 67 and incorporated herein by reference. However, a preferred embodiment will print the postage meter stamp utilizing Symbol's Portable Data File code (the PDF417 symbology) as described above.

Typically the postal meter stamp may include any combination of the following information: the day, the date, the postage storage device serial number, the E-STAMP serial number, the sender's zip code, the addressee's zip code, the expiration date of the postage storage device, the cumulative values of the strike and dollar counters, PNM registration number, the user's identification number, and the post office identification number. The postage meter stamp may contain this encrypted information incorporated within an insignia or design, or it may appear as a background for the postage amount printed in a visually recognized form.

By printing the postal meter stamp with encrypted information within the stamp, the post office can scan the postal meter stamp to verify that an item of mail has been posted with authorized postage and/or to automatically sort the mail for distribution.

Furthermore, the use of the E-STAMP MAKER program in conjunction with a database program will allow the post office to generate records indicating all E-STAMP authorized postage by post office location (or zip code), post office employee, TMU serial number, etc. This information can be easily compiled to determine post office sales, market forecasts, etc.

Next, at step 714, the user may select a U.S. postal zone or alternatively elect that the particular



piece of mail is to be sent to Canada, Mexico or some other international designation as depicted in box 808.

The E-STAMP program will automatically incorporate the aforementioned entered parameters --weight, class, zone -- in order to correctly calculate the correct postage to print in conjunction with the meter stamp and to deduct from the postage amount stored within TMU button 182.

Lastly, in step 715, the E-STAMP program utilizes the input/output ports of processor-based system 10 to send to printer/label maker 19, the correct data pertaining to the meter stamp to be printed on an envelope, letter, card or label.

The amount of postage printed on the meter stamp is automatically deducted from the amount stored within TMU button 182. Other information is also automatically updated including the usage record for this particular serial number of TMU button 182 and any other information, such as the addressee, the postage amount, the date, and the original denomination.

Note that during the selection of the various parameters within display 80, the E-STAMP program may be implemented to update the postage amount displayed within meter display 806 as each parameter is chosen on essentially a real-time basis.

Box 802 is provided for the user to insert the location from which the mail is to be sent. The date that the mail is stamped is automatically adjusted every day by the E-STAMP program and will prevent post-dating or pre-dating mail. This information is added within display 811 or may be encrypted within the postage meter stamp. The location may also be utilized by the E-STAMP program to calculate the correct postage.

Message box 812 is provided to allow the user to add a message or greeting (e.g., "Happy Holidays") to be printed next to the meter stamp. This message may be changed at any time by the user, directly or by a  
5 "merge" command in conjunction with a word processing or graphics program coupled to the E-STAMP program.

The aforementioned steps may be repeated for a subsequent piece of mail, or the user may decouple TMU button 18 from system 10.

10 Using the E-STAMP system and method, users like lawyers, accountants, advertising agencies, etc., who bill their clients for postage will be able to keep track of postage expenses on a per client basis.

The aforementioned E-STAMP and E-STAMP MAKER  
15 programs have been shown and described with respect to a "windows" operating environment on a PC. Of course, other means could be employed for implementing the present invention within a processor-based system.

20 Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A memory storage device for storing and retrieving an authorization for an amount of postage; said storage device comprising:

5 a memory;

means for limiting access to said memory to an authorized postage granting device;

10 means for coupling said storage device to said authorized postage granting apparatus wherein said storage device can receive said authorization for said postage;

means for retrievably storing said amount of postage; and

15 means for coupling said storage device to a processor-based system, wherein said processor-based system can retrieve any portion of said authorized amount of postage from said coupled device.

2. The storage device of claim 1 wherein said storage device is a touch memory utility button.

20 3. The storage device of claim 1 wherein said storage device is a smart disk.

4. The storage device of claim 1 wherein said storage device is a smart card.

25 5. The storage device of claim 1 wherein said storage device is a PCMCIA.

6. The storage device of claim 1 wherein said storage device can receive said authorization for said

postage from a remote authorized postage granting apparatus.

5       7.    The storage device of claim 6 wherein said storage device can receive said authorization for said postage by modem.

8.    An authorized postage granting apparatus, said apparatus comprising:

10           means for coupling said apparatus to a postage storage device, said device containing encoded data for identifying said device;

          means for retrieving said encoded data and for verifying the identity of said device; and

15           means controlled in part by said verifying means for transferring an authorized amount of postage to said device.

9.    The authorized postage granting apparatus of claim 8 wherein said apparatus is authorized by the postal authority.

20       10. The authorized postage granting apparatus of claim 8 wherein said apparatus can download said amount of postage to said postage storage device via the public switched network.

25       11. A processor-based system for printing a postage meter stamp with a desired amount of postage onto a piece of mail, said system comprising:

          means for removably coupling a postage storage device to said system;

          means for retrieving information from said coupled postage storage device, said information

including a total amount of postage stored in said postage storage device;

means for automatically calculating a correct amount of postage for said piece of mail as a function of mailing parameters entered into said system and particular to said piece of mail;

means for automatically deducting said correct amount of postage from said total amount of postage; and

means for formatting data to be sent to a printer coupled to said system, wherein said formatted data is operable to print said meter stamp with said correct amount of postage.

12. The system as recited in claim 11 wherein said postage storage device is a touch memory utility button.

13. The system as recited in claim 11 wherein said postage storage device is a smart disk.

14. The system as recited in claim 11 wherein said postage storage device is a smart card.

15. The system as recited in claim 11 wherein said postage storage device is a PCMCIA.

16. The system as recited in claim 11, further comprising a means for verifying that said storage device is authorized to communicate with the system.

17. The system as recited in claim 11 wherein said meter stamp comprises encrypted information in a machine-readable format.

18. A postage meter stamp comprising encrypted information in machine-readable format.

19. The postage meter stamp recited in claim 18, wherein said information includes an authorization code for a postage storage device.

20. The postage meter stamp recited in claim 18, wherein said stamp further includes a date, a sender's zip code and an addressee's zip code.

21. The postage meter stamp as recited in claim 18, wherein said stamp further includes a denomination of postage in a visually perceptible format.

22. A method for encoding user-specific information for registering a software license agreement, said method comprising the steps of:

installing a software program onto a processor-based system;

requesting a software user to input user-specific information into said system in response to a prompt;

encrypting said user-specific information in a machine-readable form; and

printing said encrypted information in a tangible media.

23. The method as recited in claim 22 wherein said user-specific information is encrypted in a two-dimensional symbology.

24. The method as recited in claim 22 further comprising the step of sending said encrypted

information to an owner of rights in said software program.

5           25. The method as recited in claim 22 further comprising the step of scanning said encrypted information into a database of registered software users.

10           26. A processor-based system for printing a postage meter stamp with a desired amount of postage onto a piece of mail, said system comprising:  
              means for reading a total amount of postage from a TMU button removably coupled to said system;  
              means for reading data from said TMU button including a unique serial number assigned to said button and verifying that said button is authorized for  
15           use in printing postage meter stamps;  
              means for automatically calculating a correct amount of postage for said piece of mail as a function of mailing parameters entered into said system and particular to said piece of mail;  
20           means for automatically deducting said correct amount from said total amount; and  
              means for formatting data to be sent to a printer coupled to said system, wherein said formatted data is operable to print said meter stamp with said  
25           correct amount of postage.

          27. The system as recited in claim 26, further comprising:

              means for verifying that said button is authorized to communicate with said system.

28. In a processor-based system, a method for printing a postage meter stamp on a piece of mail, said stamp including postage for mailing said piece of mail, said method comprising the steps of:

5           reading and displaying a serial number and a postage balance specific to a TMU button removable coupled to said system;

          receiving one or more parameters pertaining to mailing of said piece of mail;

10           automatically calculating said postage as a function of said parameters;

          automatically deducting said postage from said postage balance resulting in a new balance stored within said button; and

15           printing said postage meter stamp including said postage on said piece of mail.

29. The method as recited in claim 28, further comprising the steps of:

20           receiving address information to be printed on said piece of mail; and

          automatically printing said address information on said piece of mail.

30. The method as recited in claim 28, further comprising the step of:

25           verifying that said button is authorized to grant postage to said system.

31. A processor-based system operable for outputting data pertaining to a postage meter stamp to be printed on a piece of mail, said system comprising:

30           means for verifying that a universal storage means, programmed to contain a predetermined amount of



postage that may be printed and coupled to said system, is an authorized storage means, said means for verifying using data stored within said storage means;

5 means for retrieving a portion of an amount of postage stored within said storage means; and means for outputting data pertaining to said retrieved portion along with data operable for printing said postage meter stamp including an indication of said retrieved postage portion.

10 32. The system as recited in claim 31 further comprising means for disconnecting said storage means from said retrieving means.

33. The system as recited in claim 31 further comprising:

15 means for adding additional stored amounts to said storage means while said storage means is disconnected from said retrieving means.

20 34. The system as recited in claim 31 wherein said retrieving means is operable to retrieve a portion of postage stored at selected ones of said storage means.

35. The system as recited in claim 31, further comprising:

25 means for automatically deducting said retrieved portion of postage from said stored amount.

36. The system as recited in claim 31, wherein said outputting means is adaptable for coupling to a printer means in order to print said postage meter stamp on said piece of mail.

37. The system as recited in claim 31, further comprising:

means for displaying said retrieved portion and said amount.

5 38. The system as recited in claim 31, further comprising:

means operable for entering a weight of said piece of mail; and

10 means for automatically calculating a correct postage to be applied to said piece of mail as a function of said weight, wherein said retrieved portion is equal to said correct postage.

39. The system as recited in claim 31, further comprising:

15 means operable for entering a class of said piece of mail; and

means for automatically calculating a correct postage to be applied to said piece of mail as a function of said class, wherein said retrieved portion is equal to said correct postage.

40. The system as recited in claim 31, further comprising:

means operable for entering a zone to which said piece of mail is to be sent; and

25 means for automatically calculating a correct postage to be applied to said piece of mail as a function of said zone, wherein said retrieved portion is equal to said correct postage.

41. The system as recited in claim 31, further comprising:

30

means operable prior to said outputting of data for displaying a graphical representation of said postage meter stamp including said retrieved portion of postage.

5           42. The system as recited in claim 31 wherein said system is a computer and wherein said retrieving means and said outputting means are controlled, in part, by coded data provided on a storage medium separate from said storage means.

10           43. The system as recited in claim 42 further comprising means for removing said storage means from said system while the data from said storage medium remains associated with said system.

15           44. The system as recited in claim 31 wherein said storage means is a relatively small disk having a memory therein and certain preestablished memory patterns permanently affixed therein, said memory patterns operating in conjunction with said retrieving means to control said outputting means.

20           45. A processor-based system adaptable for inputting to a universal data storage means data pertaining to an amount of postage, said system comprising:

25               means for removable coupling said data storage means to said system;

              means for verifying that said data storage means is authorized to receive data pertaining to an amount of postage;

means operable for receiving user input  
pertaining to a desired amount of postage to be stored  
within said data storage means; and

5 means, responsive to said received user  
input, for transferring said desired amount of postage  
to said data storage means.

46. The system as recited in claim 45 wherein  
said data storage means is a TMU button coupled to said  
system.



10 47. The system as recited in claim 45, further  
comprising:

means, including data contained within said  
data storage means, for verifying that said data  
storage means is authorized to receive said data  
15 pertaining to said amount of postage.


48. The system as recited in claim 45 wherein  
said receiving means is only operable upon receiving a  
valid password from said user.

20 49. The system as recited in claim 45, further  
comprising:

means for storing an identification  
pertaining to said system within said data storage  
means along with said transfer of said amount of  
postage.

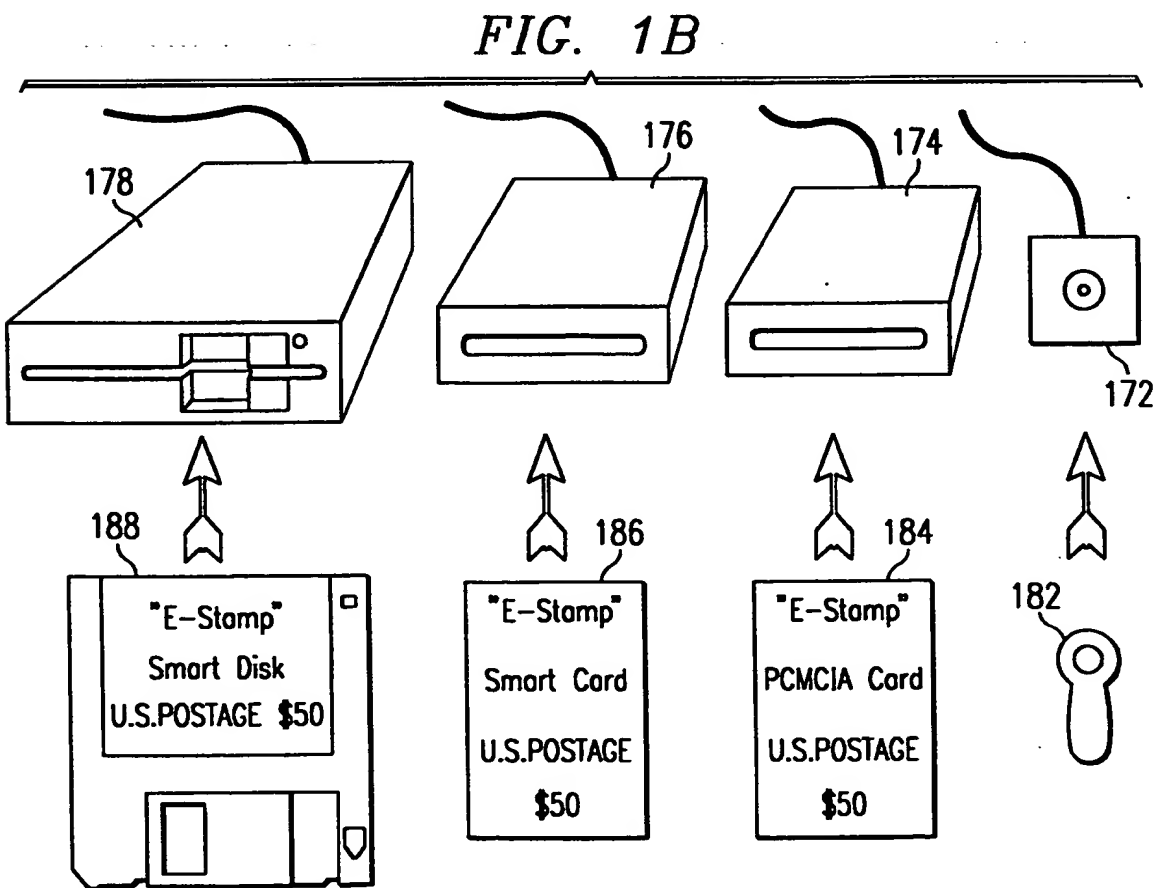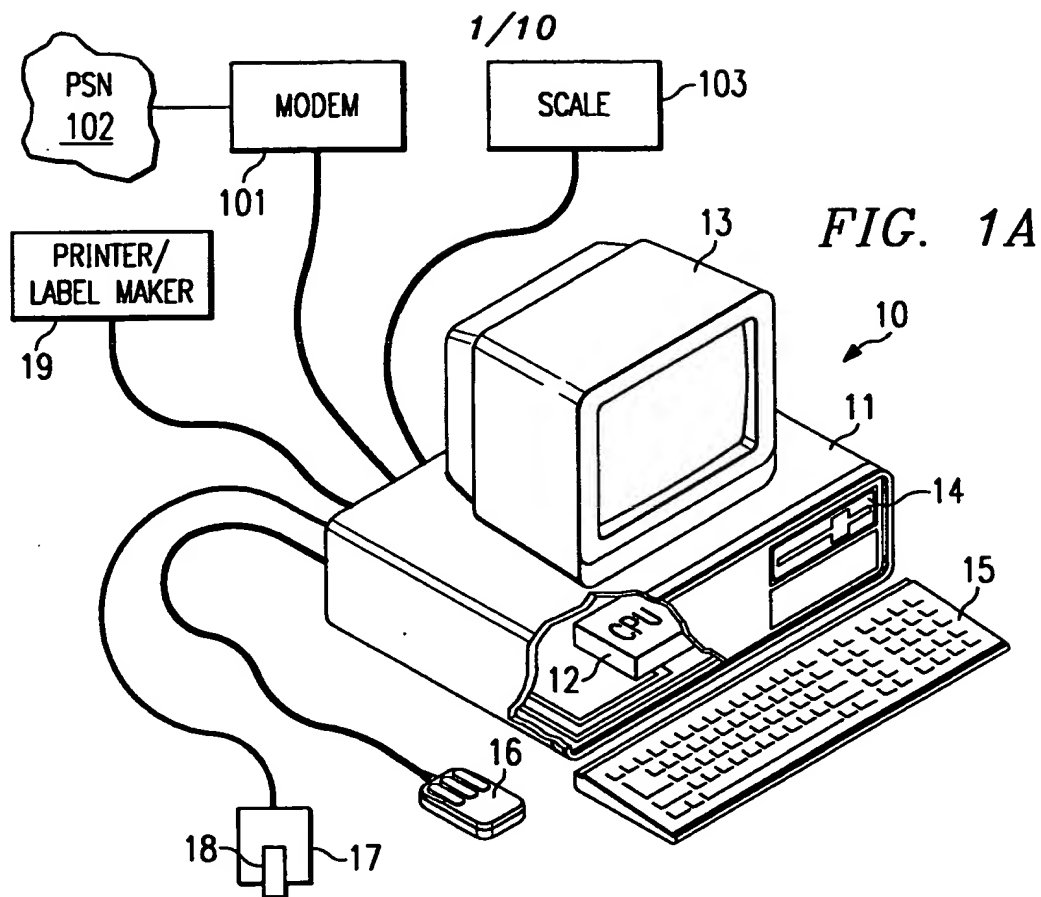

2/10

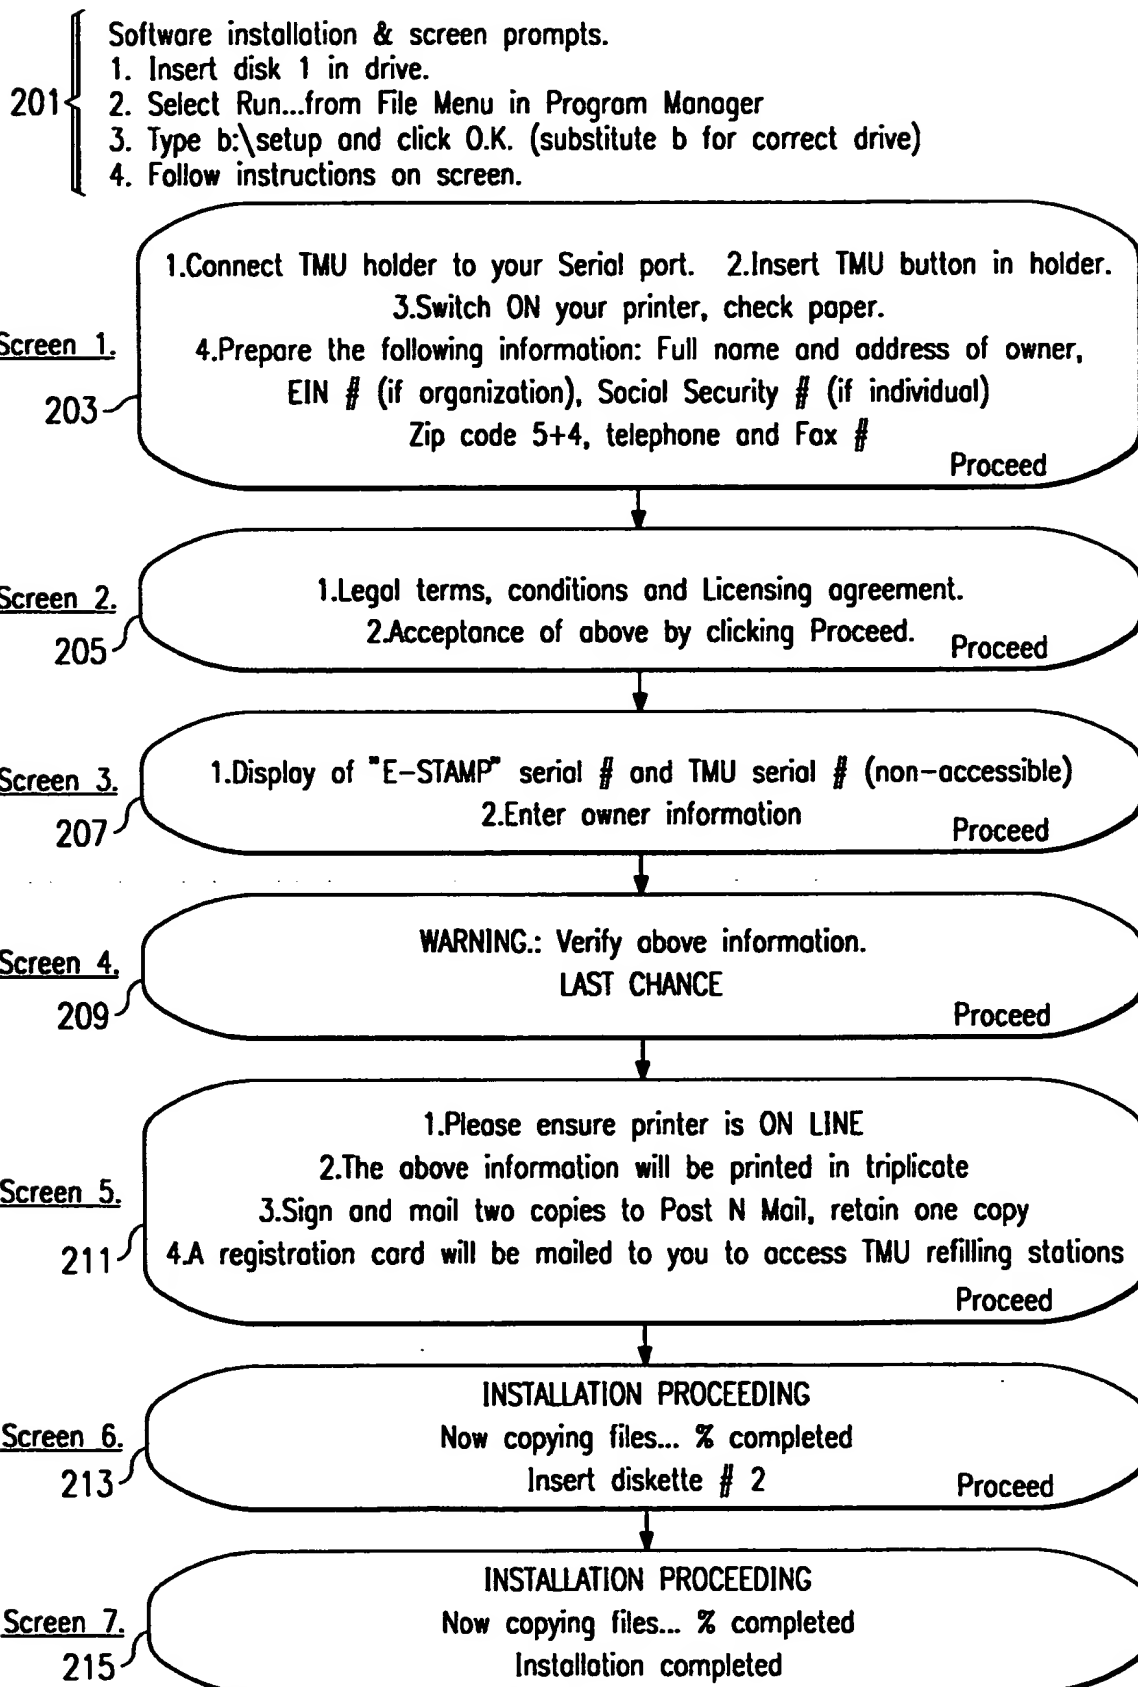**FIG. 2** "E-Stamp" - Post N Mail, Inc.

3/10

Post N Mail, Inc.  
 505 Cypress Station Dr. Suite # 505 Telephone (713)583-8909 Fax (713)699-0101  
 Houston, Tx 77030-1612

"E-Stamp"<sup>TM</sup> - Registration form

31 T.M.U. Button Serial #000000001 Date: April 20, 1994 }  
 32 E-Stamp Serial #000000001 Time: 01:29 AM } 33

35 { Registered user:  
 Individual Salim G. Kara Social Security # 636-18-0137  
 Organization Global Impex, Inc. Employer I.N. # 76-0422781  
 Address: 505 Cypress Station Dr.  
 Suite #505  
 City: Houston State: Tx Zipcode+4: 77090-1612  
 Telephone: (713)583-8909 Fax: (713)699-0101

Post N Mail License Agreement

38 { This is a legal agreement between you (an individual or an entity), the end user, and Post N Mail, Inc. If you do not agree to the terms of this Agreement, promptly return the disk package and accompanying items (including all hardware, written materials and binders or other containers) to the place you obtained them for a full refund.  
 License  
 1. Grant of License.  
 2. Term of License.  
 3. Copyright.  
 4. Other restrictions.  
 5. Limited warranty.  
 6. Customer remedies.  
 7. No Other Warranties.  
 8. No Liability for Consequential Damages.

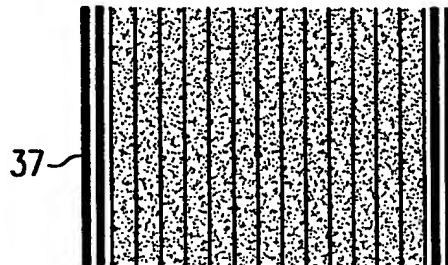


FIG. 3

4/10

FIG. 4A

Quit Options Help		E-Stamp	Post	Mail	↑ ↓
TMU Serial # 2 128 176 32 0 0 175 E-Stamp MAKER Serial # / Zip 77014-9998-44 Post ID #					
ID	403	Info 404	409	Initialize	Write 410
ID1	Password 403 BCClinton 8 Bytes PNM password 405	10 45 12 15 93 77 0 14 99 98 44 110 151 65 2 244 45 75 194 86 97 218 211 46 250 237 69 28 167 196 100 11 53 72 141 182 5 167 64 106 190 63 119 13 63 1st 2 Bytes=Time, next 3 Bytes = Date, next 6 Bytes = Post Office ID # 4 Bytes = E-Stamp Maker Ser#, Balance 30 Bytes = Random #			
ID2	193 240 33 94 85 131 83 195 407	48 10 94 101 57 55 67 187 108 65 117 111 179 125 205 132 90 24 146 186 112 240 247 2 Random # = 24 Bytes Usage Analysis = 14 Bytes Strike Counter-Descend.= 3 Bytes (start 2,500,000) \$ Counter- Descend.= 4 Bytes (start \$2,500,000.00)			
ID3	48 104 213 171 225 178 27 68 408	\$500.00 Amount \$ input/balance = 4 Bytes (Max. \$25,000.00000) User Zip = 5 Bytes Soc. Security # / EIN # = 10 Bytes (20 digits) Strike Counter- Ascend.= 3 Bytes PNM Registration # = 4 Bytes \$ Counter- Ascend.= 4 Bytes Expiry date = 3 Bytes Postage original amount= 3 Bytes			
401					
Postage original: \$500.00 Postage balance: \$ 6.72 COUNTERS CHECK: 1. \$ Ascend.+Descend. = \$2,500,000.00 2. Strikes, Ascend.+Descend. = 2,500,000					
TMU Verification PNM Registration #000000001 "E-Stamp" serial #000000001 Time: 3:18p.m. Date: 10-30-93 By: 77090-2765-65 Expiry date: 12-31-95					
402					
Total Usage = \$493.28 A) \$.01 to \$.29= 991 B) \$.30 to \$.40= 166 C) \$.41 to \$.45= 122 D) \$.46 to \$.99= 0 E) \$.1.00 to \$.1.99= 14 F) \$.2.00 to \$.3.00= 0 G) Over 3.00= 16					



5/10


FIG. 4B

Quit Options Help		E-Stamp	Post	Mail	↑	↓
TMU Serial # 2 128 176 32 0 0 175 E-Stamp MAKER Serial # / Zip 77014-9998-44 Post ID #						
ID	Password 403 BCClinton 8 Bytes PNM password	Info 404 10 45 12 15 93 77 0 14 99 98 44 110 151 65 2 244 45 75 194 86 97 218 211 46 250 237 69 28 167 196 100 11 53 72 141 182 5 167 64 106 190 63 119 13 63 1st 2 Bytes=Time, next 3 Bytes = Date, next 6 Bytes = Post Office ID # 4 Bytes = E-Stamp Maker Ser#, Balance 30 Bytes = Random #	Initialize Write	410 Post N Mail, Inc		
ID2	193 240 33 94 85 131 83 195	405 Usage Analysis = 14 Bytes Strike Counter-Descend.= 3 Bytes (start 2,500,000) \$ Counter- Descend.= 4 Bytes (start \$2,500,000.00)	406 \$500.00 Amount \$ input/balance = 4 Bytes (Max. \$25,000.0000) User Zip = 5 Bytes Strike Counter- Ascend.= 3 Bytes \$ Counter- Ascend.= 4 Bytes Postage original amount= 3 Bytes	407 48 104 213 171 225 178 27 68	408 Soc. Security # / EIN # = 10 Bytes (20 digits) PNM Registration # = 4 Bytes Expiry date = 3 Bytes	411
ID3	Postage original: \$506.72 Postage balance: \$506.72 COUNTERS CHECK: 1. \$ Ascend.+Descend. = \$2,500,000.00 2. Strikes, Ascend.+Descend. = 2,500,000					
Total Usage = \$ 0.00 A) \$.01 to \$.29= 0 B) \$.30 to \$.40= 0 C) \$.41 to \$.45= 0 D) \$.46 to \$.99= 0 E) \$1.00 to \$1.99= 0 F) \$2.00 to \$3.00= 0 G) Over 3.00= 0						
Usage Analysis Log 412						

## Touch Memory Utility

Post N Mail, Inc.  
E-Stamp™

FIG. 5

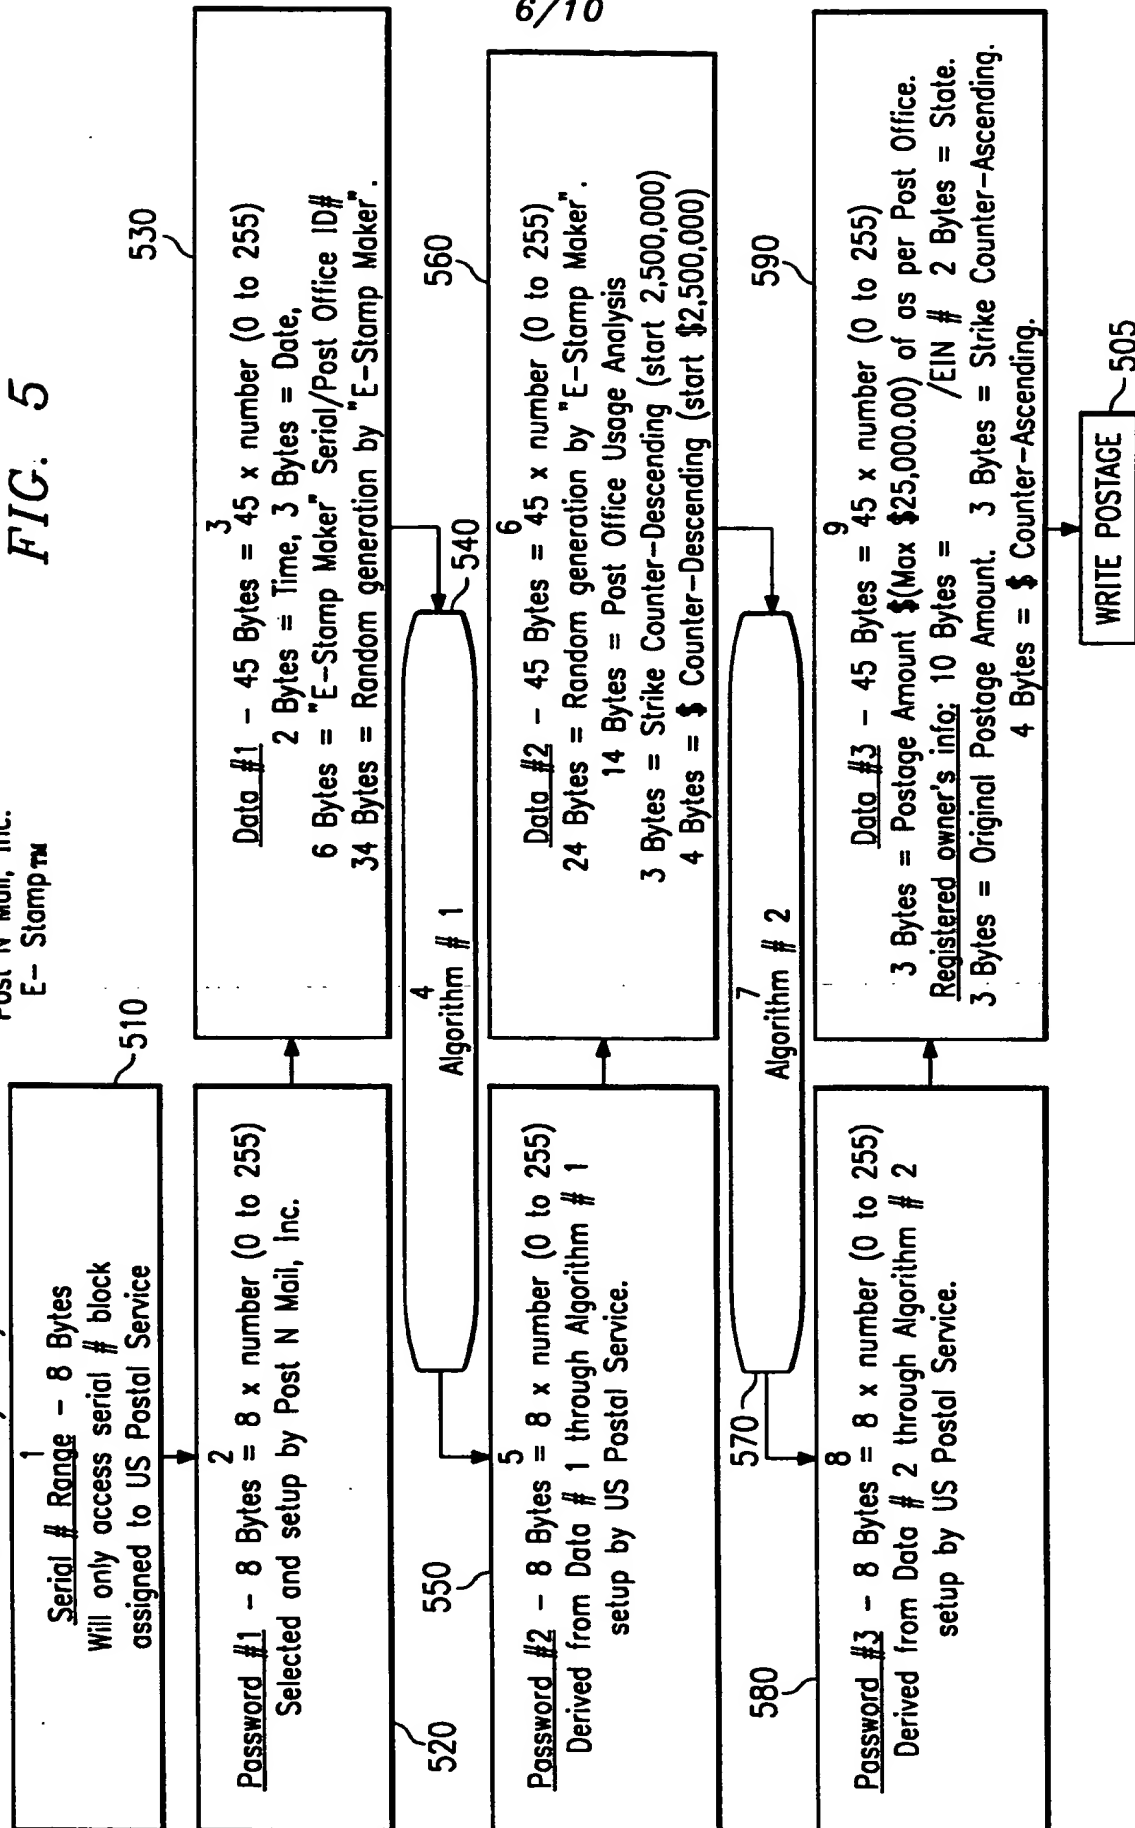

7/10

Level 1: Password.

BCLINTON

Level 2: Algorithm 1.


$$\begin{aligned}p1 &= (d1 + d4 + d7 + d10 + d13 + d16) \bmod 256 \\p2 &= (d2 + d5 + d8 + d11 + d14 + d17) \bmod 256 \\p3 &= (d3 + d6 + d9 + d12 + d15 + d18) \bmod 256 \\p4 &= (d19 + d22 + d25 + d28 + d31 + d34) \bmod 256 \\p5 &= (d20 + d23 + d26 + d29 + d32 + d35) \bmod 256 \\p6 &= (d21 + d24 + d27 + d30 + d33 + d36) \bmod 256 \\p7 &= (d37 + d38 + d39 + d40 + d41 + d42) \bmod 256 \\p8 &= (d43 + d44 + d45) \bmod 256\end{aligned}$$

Level 3: Algorithm 2.

$$\begin{aligned}p1 &= d1 \bmod 256 \\p2 &= (d2 + d3) \bmod 256 \\p3 &= (d4 + d5 + d6) \bmod 256 \\p4 &= (d7 + d8 + d9 + d10) \bmod 256 \\p5 &= (d11 + d12 + d13 + d14 + d15) \bmod 256 \\p6 &= (d16 + d17 + d18 + d19 + d20 + d21) \bmod 256 \\p7 &= (d22 + d23 + d24 + d25 + d26 + d27 + d28) \bmod 256 \\p8 &= (d29 + d30 + d31 + d32 + d33 + d34 + d35 + d36 + d37 + d38 + d39 \\&\quad + d40 + d41 + d42 + d43 + d44 + d45) \bmod 256\end{aligned}$$

*FIG. 6*

FIG. 7

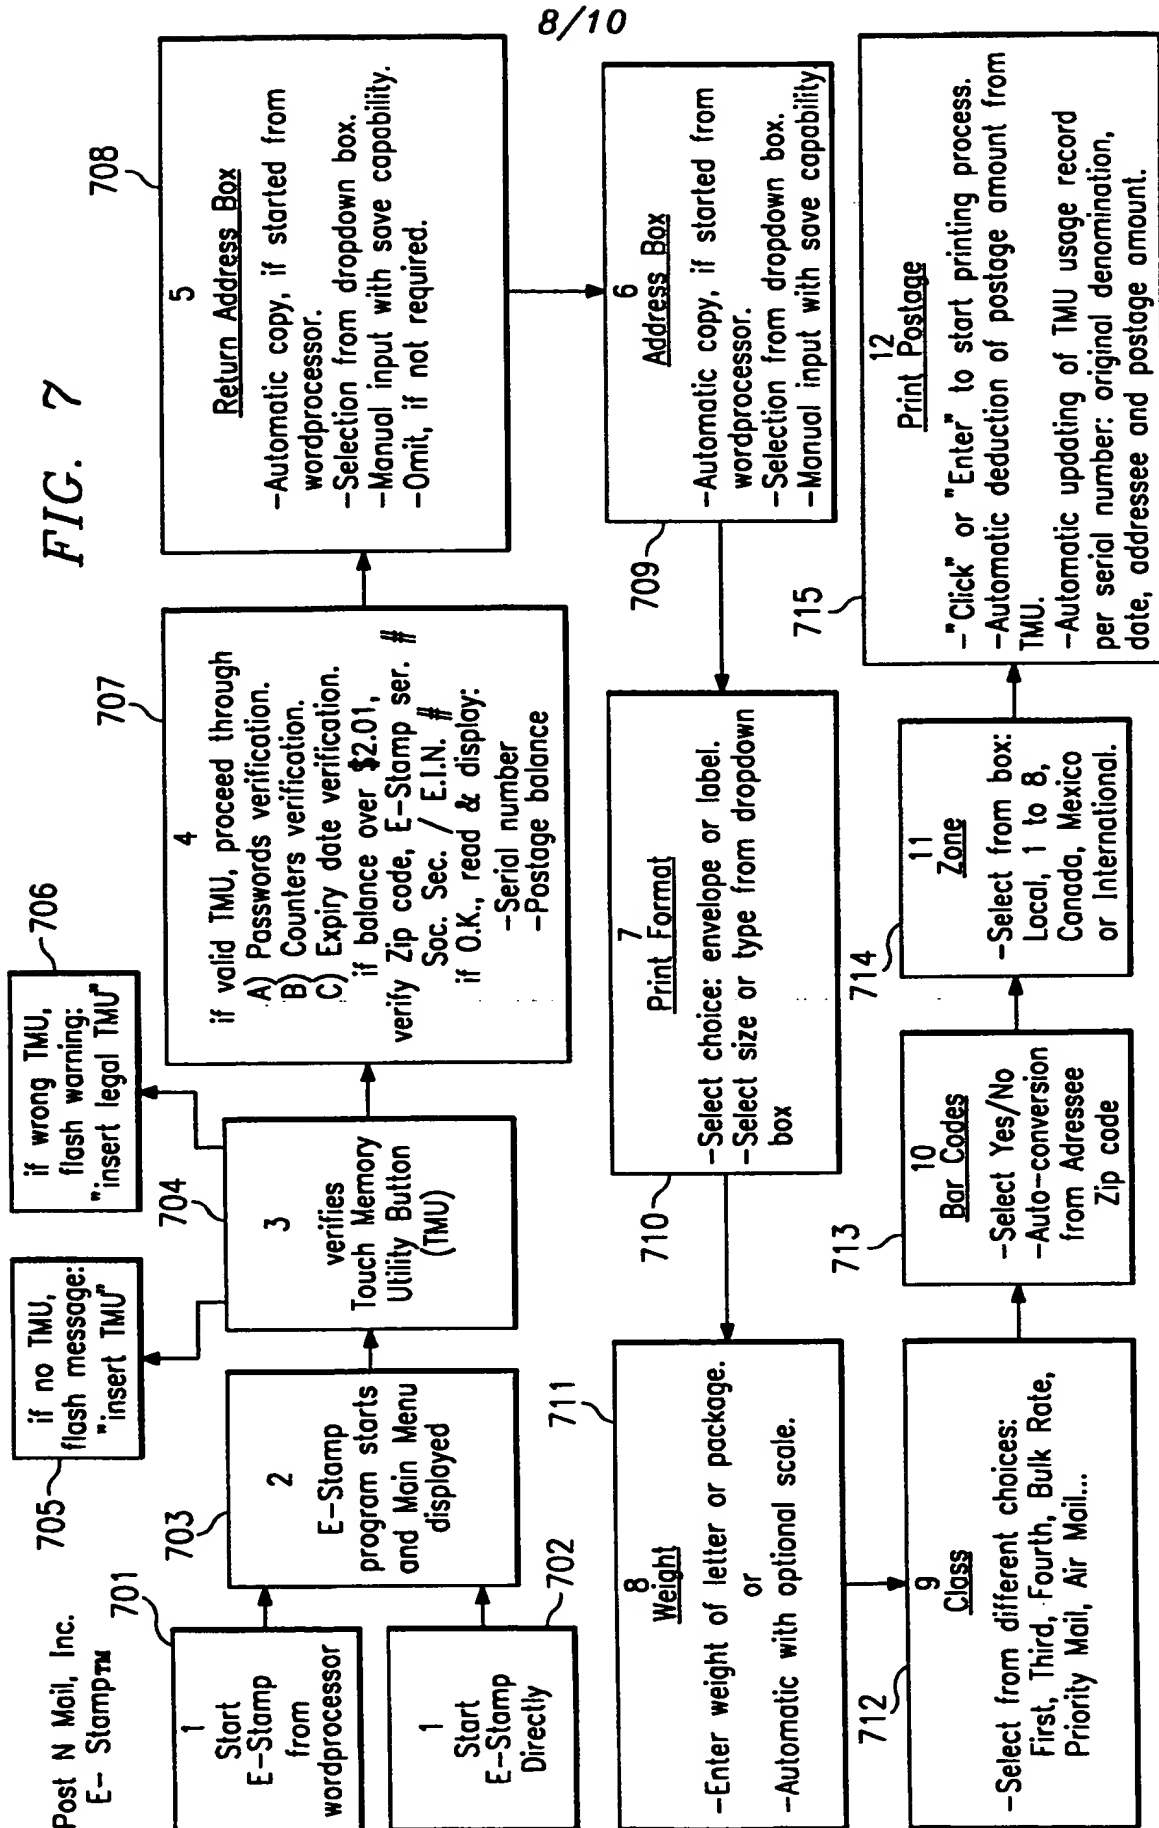


**FIG. 8**

File Postage Calculation		E-Stamp Ser#/TMU Ser# ~801																							
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <b>Salim Kara</b>            505 Cypress Station Dr.            Unit 505            Houston, Tx. 77090            Return Address         </div>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           MESSAGE OR LOGO         </div>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           Houston, TX         </div>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">            Postage Button         </div>																						
<div style="border: 1px solid black; padding: 5px;"> <input type="radio"/> Other  <input type="radio"/> Label  <input checked="" type="radio"/> Envelope  <div style="border: 1px solid black; padding: 2px; display: inline-block;">Standard</div> <div style="float: right; text-align: center;">↓</div> </div>	<div style="border: 1px solid black; padding: 5px;">           Mr. David Tannenbaum            Winstead, Sechrest &amp; Minick.            5400 Renaissance Tower            1201 Elm Street            Dallas, Tx 75270            Address         </div>	<div style="border: 1px solid black; padding: 5px;">           PMTool            123456            \$0.29         </div>	<div style="border: 1px solid black; padding: 5px;"> </div>																						
		<div style="border: 1px solid black; padding: 5px;">           Weight           <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; height: 30px;"></td> <td style="width: 50%; text-align: center;">lbs.</td> </tr> <tr> <td></td> <td style="text-align: center;">oz.</td> </tr> </table> </div>		lbs.		oz.	<div style="border: 1px solid black; padding: 5px;">           Class           <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="height: 30px;">First Class</td> </tr> <tr> <td>Third Class</td> </tr> <tr> <td>Fourth Class</td> </tr> <tr> <td>Priority Mail</td> </tr> <tr> <td>Air Mail</td> </tr> </table> </div>	First Class	Third Class	Fourth Class	Priority Mail	Air Mail	<div style="border: 1px solid black; padding: 5px;">           Zone           <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="height: 30px;">Local</td> </tr> <tr> <td>1</td> </tr> <tr> <td>2</td> </tr> <tr> <td>3</td> </tr> <tr> <td>4</td> </tr> <tr> <td>5</td> </tr> <tr> <td>6</td> </tr> <tr> <td>7</td> </tr> <tr> <td>8</td> </tr> <tr> <td>Canada</td> </tr> <tr> <td>Mexico</td> </tr> <tr> <td>International</td> </tr> </table> </div>	Local	1	2	3	4	5	6	7	8	Canada	Mexico	International
	lbs.																								
	oz.																								
First Class																									
Third Class																									
Fourth Class																									
Priority Mail																									
Air Mail																									
Local																									
1																									
2																									
3																									
4																									
5																									
6																									
7																									
8																									
Canada																									
Mexico																									
International																									
		<div style="border: 1px solid black; padding: 5px;">           Print Format           <div style="display: flex; justify-content: space-between;"> <span><input type="radio"/> Other</span> <span><input type="radio"/> Label</span> <span><input checked="" type="radio"/> Envelope</span> </div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">Standard</div> <div style="float: right; text-align: center;">↓</div> </div>	<div style="border: 1px solid black; padding: 5px;">           Balance            \$498.28         </div>																						
		<div style="border: 1px solid black; padding: 5px;">           Print Postage         </div>	<div style="border: 1px solid black; padding: 5px;">           TX            Dec 07 93         </div>																						

10/10

FIG. 9

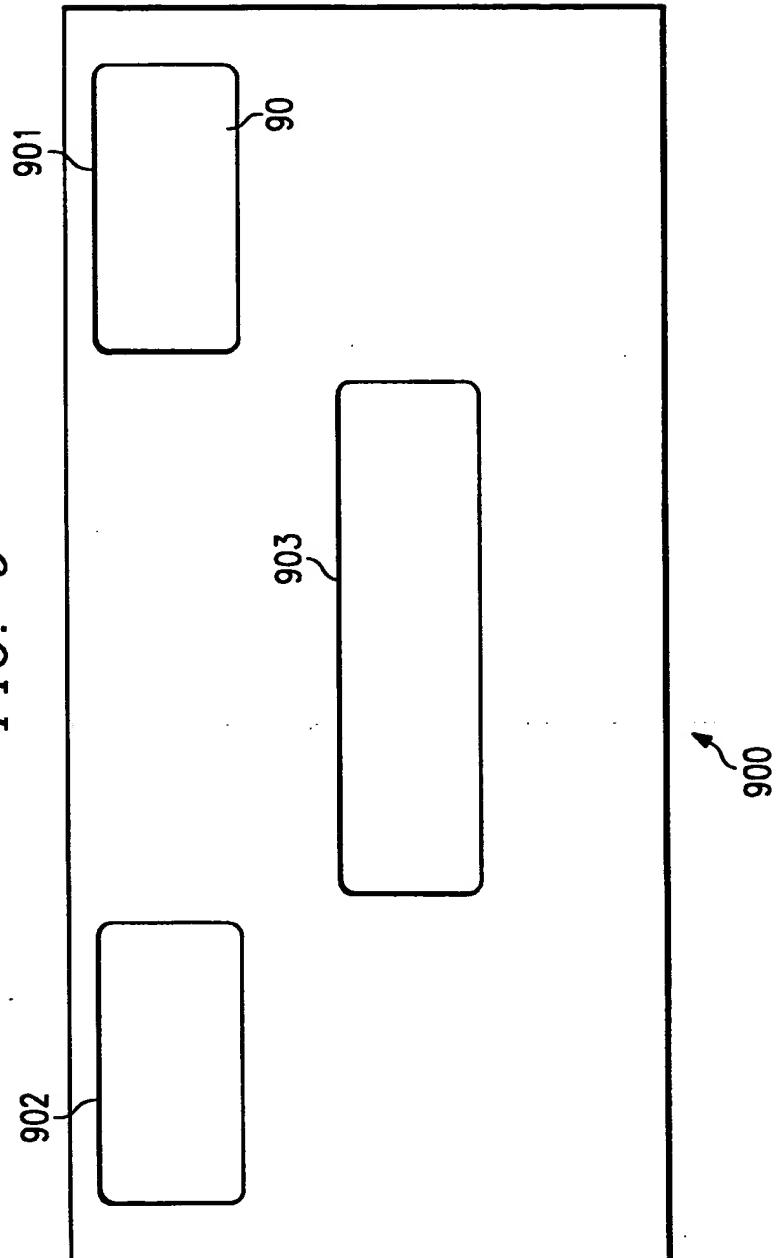

## INTERNATIONAL SEARCH REPORT

Intern: 1 Application No

PCT/US 95/00237

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 6 G07B17/02 G07B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G07B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,88 01818 (WRIGHT ET AL) 10 March 1988  see page 34, paragraph 2 - page 36, paragraph 1; figures 1,6A,10 ---	1,4,5,8, 9,11, 14-23, 31-43, 45,47-49
A	EP,A,0 137 737 (PITNEY BOWES) 17 April 1985 see claim 1; figure 1 ---	1-49
A	GB,A,2 251 210 (ALCATEL BUSINESS SYSTEMS LTD) 1 July 1992 see claim 1; figure 1 ---	1-49
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

3 May 1995

Date of mailing of the international search report

29.05.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Kirsten, K

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 95/00237

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,90 01741 (AUTOMATED IDENTIFICATION SYSTEMS INC) 22 February 1990 see page 6, line 8 - line 20; claim 1; figure 1 ---	1-49
A	FR,A,2 580 844 (PITNEY BOWES INC) 24 October 1986 see claim 1; figures 1,2 -----	1-49



# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern: AI Application No

PCT/US 95/00237

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-8801818	10-03-88	US-A- 4802218	31-01-89
		AT-T- 116778	15-01-95
		AU-B- 605443	10-01-91
		AU-A- 7961287	24-03-88
		CA-A- 1320578	20-07-93
		CA-A- 1326911	08-02-94
		CA-A- 1296809	03-03-92
		DE-D- 3750958	16-02-95
		EP-A- 0294397	14-12-88
		EP-A- 0619563	12-10-94
		EP-A- 0619564	12-10-94
		EP-A- 0619565	12-10-94
		FI-B- 92781	15-09-94
		JP-T- 1500863	23-03-89
		US-A- 4864618	05-09-89
		US-A- 4900904	13-02-90
		US-A- 4900903	13-02-90
EP-A-137737	17-04-85	CA-A- 1233252	23-02-88
		JP-A- 60107173	12-06-85
		US-A- 4763271	09-08-88
GB-A-2251210	01-07-92	FR-A- 2673305	28-08-92
		SE-A- 9103654	01-07-92
WO-A-9001741	22-02-90	US-A- 5065000	12-11-91
		EP-A- 0426755	15-05-91
FR-A-2580844	24-10-86	US-A- 4757537	12-07-88
		US-A- 4725718	16-02-88
		US-A- 4743747	10-05-88
		AU-B- 584187	18-05-89
		AU-A- 5634586	23-10-86
		AU-B- 590752	16-11-89
		AU-A- 5634686	23-10-86
		AU-B- 588308	14-09-89
		AU-A- 5634786	23-10-86
		CA-A- 1259704	19-09-89
		CA-A- 1258916	29-08-89
		CH-A- 675496	28-09-90

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 95/00237

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2580844		CH-A- 672378	15-11-89
		CH-A- 674098	30-04-90
		DE-A- 3613007	23-10-86
		DE-A- 3613008	13-11-86
		DE-A- 3613025	23-10-86
		FR-A- 2580843	24-10-86
		FR-A- 2580845	24-10-86
		GB-A, B 2173741	22-10-86
		GB-A, B 2174039	29-10-86
		GB-A, B 2173742	22-10-86
		JP-A- 62058388	14-03-87
		JP-A- 61292790	23-12-86
		JP-A- 61292791	23-12-86
		US-A- 4775246	04-10-88
		CA-A, C 1263676	05-12-89
		CA-A- 1255800	13-06-89

---